


LAND CORNER RECORD


Index: J-11	Corner: 1/4 CORNER BETWEEN SEC 9 & 16			State of Indiana - Hoosier National Forest	
Section: 9, 16	Township: 7N	Range: 1E	P.M.: 2nd	County: Monroe	
Coordinate:	Lat./N:	Lon./E:		Datum:	

CORNER HISTORY: (Chronological history of corner)					
1.) Date of Survey:		Surveyor:	Monument:	Recording Information:	Monument Photograph:
1980		T. Cummings	Sandstone	USFS Records	
Reference Objects:	Species:	Diameter:	Bearing:	Distance:	
	B. Oak	4"	S 61° W	6.85'	
	R. Oak	4"	N 76° E	18.82'	
	W. Oak	4"	N 73° W	12.00'	
Evidence Found:					
Monument Found:		Found 8"x7"x6" stone w/ "+" at FE corner.			
2.) Date of Survey:		Surveyor:	Monument:	Recording Information:	
June 11, 1981		E. Farkas	Sandstone	BK 155 PG 516, Monroe Co. Recorder	
Reference Objects:	Species:	Diameter:	Bearing:	Distance:	
	W. Oak	5"	N 17° W	12.00'	
	B. Oak	4"	S 58° W	6.9'	
	R. Oak	5"	N 73° E	12.8'	
Evidence Found:		Monument surrounded by other stones, old fence N, S, E & W.			
Monument Found:		8"x7" irregular shaped stone found 0.5' above grade with a "+" on top			

ACCESSORIES: Bearing and distances from monument to witness object.

Reference Objects:	Object or Tree Species:	Diameter:	Bearing:	Distance:
	W. Oak	10"	N 56° E	11.49'
	Oak	12"	S 65° W	20.55'
	R. Oak	5"	S 04° W	10.68'
Monument Found or Set:		8"x7" irregular shaped stone found 0.5' above grade with a "+" on top.		

MONUMENT SKETCH	NARRATIVE REFERENCE:
	The monument is a 8"x7" irregular shaped stone found 0.5' above grade with a "+" on top. Monument is 3/4 up a northerly facing slope. No evidence of fence as reported earlier.

SECTION DIAGRAM	PERPETUATION RECORD:
 Corner Location = ●	Monument found undisturbed per 1981 Land Corner Record. Established three new bearing trees.
Section: 9,16	Prepared By: BRG # 7308 Date: 12/27/2012


Approved by SRB 2-26-2013


LAND CORNER RECORD

Index: J-11	Corner: 1/4 CORNER BETWEEN SEC 9 & 16			<i>State of Indiana - Hoosier National Forest</i>	
Section: 9, 16	Township: 7N	Range: 1E	P.M.: 2nd	County: Monroe	
Coordinate:	Lat./N:		Lon./E:		Datum:

CORNER HISTORY: (Chronological history of corner)					
1.) Date of Survey:	Surveyor:	Monument:	Recording Information:		Monument Photograph:
1980	T. Cummings	Sandstone	USFS Records		
Reference Objects:	Species:	Diameter:	Bearing:	Distance:	
	B. Oak	4"	S 61° W	6.85'	
	R. Oak	4"	N 76° E	18.82'	
	W. Oak	4"	N 73° W	12.00'	
Evidence Found:					
Monument Found:	Found 8"x7"x6" stone w/ "+" at FE corner.				
2.) Date of Survey:	Surveyor:	Monument:	Recording Information:		
June 11, 1981	E. Farkas	Sandstone	BK 155 PG 516, Monroe Co. Recorder		
Reference Objects:	Species:	Diameter:	Bearing:	Distance:	
	W. Oak	5"	N 17° W	12.00'	
	B. Oak	4"	S 58° W	6.9'	
	R. Oak	5"	N 73° E	12.8'	
Evidence Found:	Monument surrounded by other stones, old fence N, S, E & W.				
Monument Found:	8"x7" irregular shaped stone found 0.5' above grade with a "+" on top				

ACCESSORIES: Bearing and distances from monument to witness object.				
Reference Objects:	Object or Tree Species:	Diameter:	Bearing:	Distance:
	W. Oak	10"	N 56° E	11.49'
	Oak	12"	S 65° W	20.55'
	R. Oak	5"	S 04° W	10.68'
Monument Found or Set:	8"x7" irregular shaped stone found 0.5' above grade with a "+" on top.			

MONUMENT SKETCH	NARRATIVE REFERENCE:
	The monument is a 8"x7" irregular shaped stone found 0.5' above grade with a "+" on top. Monument is 3/4 up a northerly facing slope. No evidence of fence as reported earlier.

SECTION DIAGRAM	PERPETUATION RECORD:
 Corner Location = ●	Monument found undisturbed per 1981 Land Corner Record. Established three new bearing trees.
Section: 9,16	Prepared By: BRG # 7308 Date: 12/27/2012

MONUMENT RECORD



STATE OF INDIANA - COUNTY OF MONROE

SECTION 9 AND 16, TOWNSHIP 7 NORTH, RANGE 1 EAST

MONUMENT DESCRIPTION & REMARKS

POINTED STONE WITH "X" ON TOP. STONE SITS ABOUT 8" ABOVE
THE GROUND AND WAS SURROUNDED WITH OTHER STONES.

RECOVERY TIE DRAWING

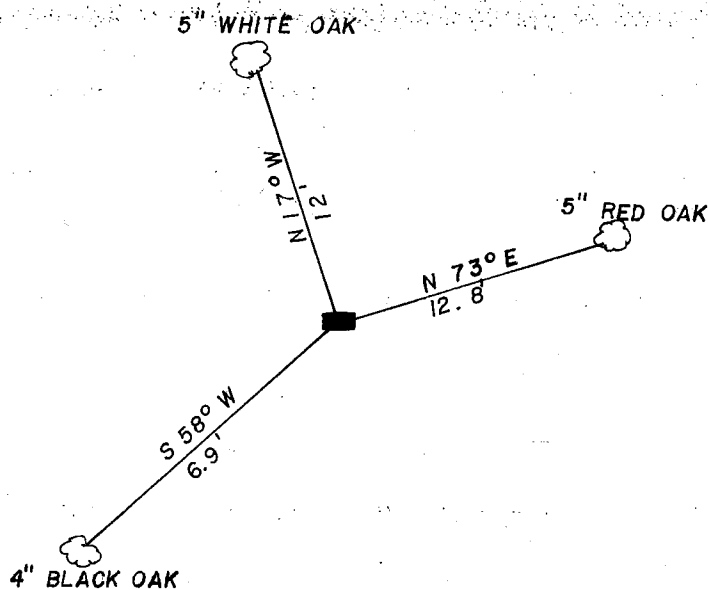

(•) AT CORNER



NOT TO SCALE

STATE OF INDIANA

COUNTY OF MONROE

I, EDMUND O. FARKAS HEREBY CERTIFY THAT THIS
DOCUMENT WAS PREPARED UNDER MY DIRECTION IN ACCORDANCE
WITH THE PROVISIONS OF SECTION 17-3-64-4 - 17-3-64-8 OF
THE INDIANA CODE, BEING ACTS OF 1965, CHAPTER 319; AND
THE ABOVE DATA IS GIVEN UNDER MY HAND AND SEAL
THIS 30 DAY OF APRIL, 1981 A.D.

SPACE
RESERVED
FOR
RECORDING
OFFICER.

INDIANA REGISTERED LAND SURVEYOR NO. _____

OR _____

UNITED STATES GOVERNMENT AGENCY

TITLE _____

TOWNSHIP:

POLK

CORNER I.D.

K - 9

RECORDED
A.M. P.M. 1:42

POIK-K09

MAR 18 1985

168704

Virginia H. Henson
RECORDER MONROE CO., IND
R9-7150-15 (5/64)

BOOK 155 PAGE 516

CERTIFIED LAND CORNER RESTORATION

State of Indiana

County of Monroe

ss.

I, Edmund O. Farkas, do hereby certify that on the 30th day of April, 1981, I found evidence of the 1/4 Section corner of Sections 9 and 16 Township 7 North, Range 1 East, Second Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner:

Description of original monument and accessories and subsequent restorations:

Original monument was a wood post set in 1814. Original bearing trees:

W.Oak	Beech
8"	8"
S31W	N4W
19 Links	3 Links

Subsequent survey by L.S. Buskirk, Monroe Co. Surveyor, filed in Monroe Co. Surveyor's Office, 1861, Book 2, Page 46. His bearing tree was:

W.Oak
4"
S31E
1 1/2 Links

Description of corner evidence found:

Found a pointed stone with an + on top, + is small in size 1"x1 1/2". Stone sits about 8" above the ground and was surrounded with other stones. There are old fence lines running north, south, east and west from stone. No evidence of the original or subsequent accessories was found.


Description of monument and accessories I established to perpetuate the original location of this corner:

The stone was left in place and the following witnesses were established:

White Oak
5"
N17W
12.0 Feet

Black Oak
4"
S58W
6.9 Feet

Red Oak
5"
N73E
12.8 Feet

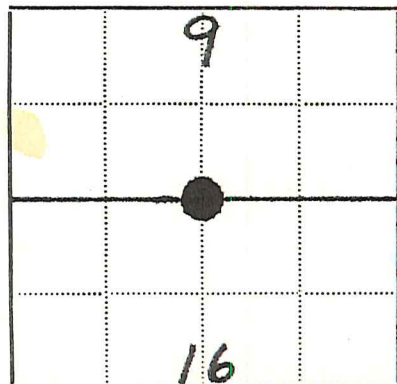

● = Corner monument restored
□ =

Resident witnesses Kenneth W. Anderson

Dated at Bedford, Indiana, this 11th day of June 1981.

Signature Edmund O. Farkas Title County Surveyor
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Surveyors Registration No. S0114

Office of County of
I hereby certify that the within instrument was filed in this office for record on the day of 19, and was filed in Book No. Page No. of County Records.

Signature Title


Township 7 North, Range 1 East, Section 9 & 16, Index No. J-11, Page No.
this instrument was prepared

Index No. 511
(Alphabetical - Numerical)LAND CORNER RECORD
(RECTANGULAR SURVEYS)

RS-5680-11 (5/12/80)

T. 7N R. 1E 2nd Mer. N.F. Hoosier County Monroe State IN
1/4 Corner common to sections 16 9 and

EXISTING SURVEYS	
Original Government Survey	Original Evidence Found
Year surveyed _____	Year of search _____ By _____
Original monument _____ (Wood post, stone, pile of stones, pipe, etc.)	Monument found _____
Bearing Trees	Original Bearing Trees Found
Species _____	Species _____
Diameter _____	Diameter _____
Bearing _____	Bearing _____
Distance _____	Distance _____
Subsequent Corner Restoration	Evidence of Subsequent Corner Restoration Found
Year surveyed _____ By _____	Year of search <u>1980</u> By <u>Tim Cummings</u>
Where filed or recorded _____	<u>Sandstone; 8"X7"X6" w/ +</u>
Monument _____ (Original, concrete post, iron rod, etc.)	
Bearing Trees, Reference Objects	
Species _____	
Diameter _____	
Bearing _____	
Distance _____	



Sketch

○ Corner ▨ F.S. Land

At time of search:

1. Did you have the record description?
Yes ☒ No ☐2. How was search area located?
Pacing, chaining, photos, maps,
etc. _____3. Man hours spent in search 5 min.4. Do you think additional search might
recover evidence? Yes ☐ No ☒5. Signature Tim Cummings

Relation of Evidence to Record Features Along Section Lines

Section line to sections _____
Object _____
Record distance _____
Measured distance _____

Other Evidence

Describe evidence of use and occupation such as roads, fences, clearings, timber cutting lines, plantations, etc. Cite source of testimony if any. Down logging trail on ridge top from St. Rd. 446, 50' North down slope from trail, hollow, 120' South of hollow.
Fence and tree lines running East, West, and North, Also a tree line from South.
Stone is at fence corner

Perpetuation Record

Monument and accessories established. Include brief description of area.


B. T.
Cor. Tag
B. O.
4"
56' 10" W
6.85B. T.
Cor. Tag
B. O.
4"
N 76° E
18.82'B. T.
Cor. Tag
W. O.
4"
N 13° W
12.00'Certified corner restoration certificate prepared: Yes ☐ No ☐
Filed in county records at _____ Date _____ County Document No. _____
Identified on aerial photo No. _____ Which is filed at _____

LAND CORNER RECORD

5680-2

1. T 7N R 1E No. _____ Cor. _____ Mer. 2d State Indiana N.F. Hoosier Dist. Brown

2. Corner Status



3. Original Description _____ Vol. _____ Page _____ Where Recorded _____

4. Description of Corners:

Sandstone 6" x 4" x 6"

5. Investigation Notes:

stone at old fence corner,

7. Photo Identification

Photo No. _____

Ident. By: _____

8. Plane Coordinate Position Data

State _____ Zone _____

X _____

Y _____

Estab. By _____

Field Book No. _____

Where Filed _____

9. Evaluation

Authentic _____

Needs Verif. _____ Monument _____

Re-estab. _____ Survey _____

Land Status _____

6. Signed _____ Title _____ Date _____

PERPETUATION RECORD

10. Monument:

11. Accessories

Field Book _____ Page _____

12. Set By _____ Title _____

License _____ Agency _____ Date _____

13. Recorded By _____ (Agency) _____ Volume _____ Page _____

(Date) _____ (City) _____ (County) _____ (State) _____

14. Remarks:

Index No. J-11
(Alphabetical - Numerical)


LAND CORNER RECORD
(RECTANGULAR SURVEYS)

R9-7150-4 (Rev. 6/13/67)
GPO 806-924

T. 7N R. 1E 2nd Mer. N.F. Noosier County Monroe State IND.
14 Section Corner common to sections 9, 16, and _____

EXISTING SURVEYS

Original Government Survey		Original Evidence Found	
Year surveyed <u>1814</u>		Year of search _____	By _____
Original monument <u>Wood Post</u> (Wood post, stone, pile of stones, pipe, etc.)		Monument found _____	
Bearing Trees Species <u>W.O.</u> <u>Beech</u> Diameter <u>8"</u> <u>8"</u> Bearing <u>S 31 W</u> <u>N 4 W</u> Distance <u>19</u> <u>IKs</u> <u>3</u> <u>IKs</u>		Original Bearing Trees Found Species _____ Diameter _____ Bearing _____ Distance _____	
Subsequent Corner Restoration		Evidence of Subsequent Corner Restoration Found	
Year surveyed _____	By _____	Year of search <u>1975</u>	By <u>H. Dorton - E. H. Hall</u>
Where filed or recorded _____		<u>Found 8" x 8" stone 6" x 3 1/2" - 8" high</u>	
Monument _____ (Original, concrete post, iron rod, etc.)		<u>Mounted on top, Fences from NW</u>	
Bearing Trees, Reference Objects		Bearing Trees, Reference Objects	
Species _____			
Diameter _____			
Bearing _____			
Distance _____			



○ Corner ■ F.S. Land

Relation of Evidence to Record Features Along Section Lines

Section line to sections _____

Object _____

Record distance _____

Measured distance _____

Other Evidence

Describe evidence of use and occupation such as roads, fences, clearings, timber cutting lines, plantations, etc.. Cite source of testimony if any.

Perpetuation Record

Monument and accessories established. Include brief description of area.

At time of search:

1. Did you have the record description?
Yes ☒ No _____

2. How was search area located?
Pacing, chaining, photos, maps, etc. _____

3. Man hours spent in search 2 hr.

4. Do you think additional search might recover evidence? Yes _____ No _____

5. Signature _____

Certified corner restoration certificate prepared: Yes _____ No _____

Filed in county records at _____ Date _____ County Document No. _____

Identified on aerial photo No. _____ Which is filed at _____